

Descripción / Description




- Varilla radiante de cable de acero recubierto de tubo termorretráctil negro.
- Base con rótula de ABS, suministrada con 5 metros de cable RG-58 sin conector.
- Montaje de la antena en posición horizontal o vertical y desde el interior o el exterior del vehículo.
- Posibilidad de ajuste bajo pedido.
- Steel wire covered with black shrinkable tube whip.
- ABS rotary base, supplied with 5 m of RG-58 cable without connector.
- Installation of the antenna horizontal or vertical position and from inside or outside the vehicle.
- Custom tuning by order.

Especificaciones Eléctricas / Electrical Specifications


Frecuencia / Frequency	375-520 MHz
Ganancia / Gain	0 dBd / 2 dBi
Radiación / Radiation	Omnidirectional
Polarización / Polarization	Vertical
Potencia máxima / Max. Power	150 W
Impedancia / Impedance	50 Ω
R.O.E. / V.S.W.R.	$\leq 1,3$ in central frequency
Ancho de banda / Bandwidth	5% @ VSWR $\leq 1,5$
Cable / Cable	5 m RG-58
Conector / Connector	Optional, not included (BNC, N, UHF, ...)
Tipo / Type	Whip antenna $\lambda/4$

Especificaciones Mecánicas / Mechanical Specifications

Base / Base	Conical base in ABS and zamak, Screw of the whip M6 male
Varilla / Whip	Conical in stainless steel 17-7PH black chromed
Montaje / Installation	On metallic surface with hole \varnothing 19 mm
Longitud / Length	23 cm max. Base included
Peso / Weight	300 g

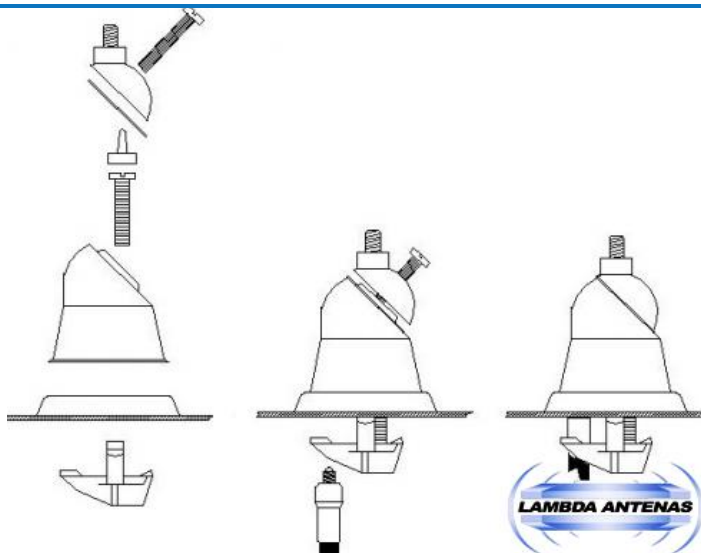

CM-70 Base Montaje

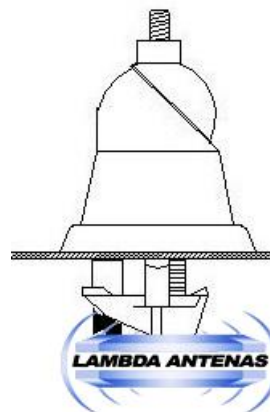

CM-70 Mounting Base